
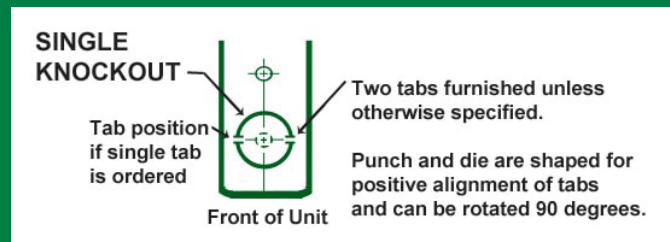


ELECTRICAL KNOCKOUTS

ARE USED TO CREATE TABS IN ELECTRICAL OUTLET CASINGS SO THEY CAN BE PUSHED OUT WHEN THE HOLE NEEDS TO BE USED


SINGLE KNOCKOUTS

Standard units with custom punches and dies are used for forming single electrical knockouts. The dies have built-in strippers for easy removal of the formed work piece. The maximum material thickness is 1/16" mild steel.



DOUBLE KNOCKOUTS

Both standard and modified units are used with custom punches and dies for forming double electrical knockouts. The tooling is designed per customer specifications. The dies have built-in strippers for easy removal of the formed work piece. The maximum material thickness is 1/16" mild steel.

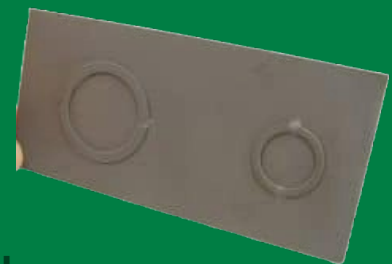

CONTACT UNIPUNCH TO LEARN MORE ABOUT PUNCHING PARTS FAST